



SOLAR STIK®

Transom Mount Mini Foot

Item # 17-000005


Overview

The Transom Mount Mini Foot is designed for high adaptability, but some vessels may have a stern configuration that requires a special lower-arm support.

A standard Transom Mount Lower Support Arm uses a 4-inch diameter foot pad, and the minimum “installed” lower support arm length is 8 inches. A Mini Foot reduces the minimum lower arm length to 2 inches and the foot pad diameter to just 3 inches.

The Transom Mount Mini Foot provides a versatile solution in three situations:

1. The desired mounting location for the lower support arm is smaller than the standard 4-inch foot pad (such as installing the Transom Mount to a transom gunnel or support).
2. The Solar Stik System operating height may be a concern and the Transom Mount needs to be installed close to a surface.
3. The closer the Transom Mount is installed to a surface, then the stronger the overall installation becomes. This is a key factor when using the Solar Stik to support additional equipment (such as a lifting davit) that may add additional stress to the overall mount installation.

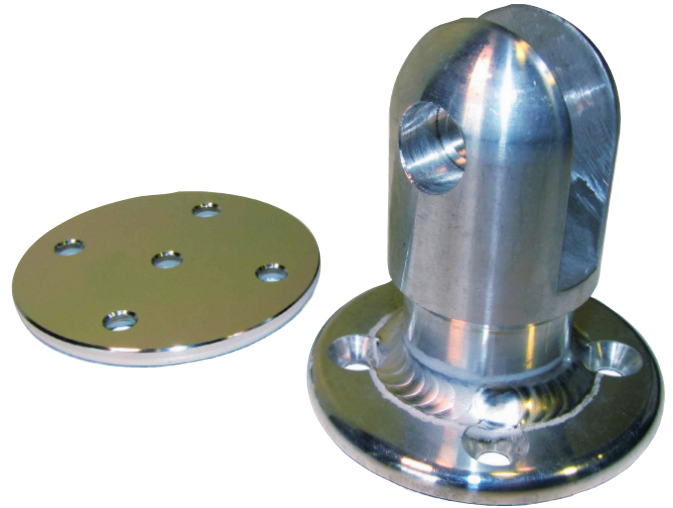

Construction

23-inch diameter, 4-hole pad and backing plate

T6061 aluminum alloy



© 2016 Solar Stik, Inc.
All Rights Reserved. Solar Stik is a registered trademark of Solar Stik, Inc.

SS20160817

800.793.4364
info@solarstik.com
www.solarstik.com